



**O
E
M**

FRAMES

ROAD | GRAVEL | MTB | EBIKE



FRAMES/CONTENTS

ROAD SERIES 01 - 06

GRAVEL SERIES 07 - 09

MTB SERIES 10 - 14

EBIKE SERIES 15 - 23





R1018-D

Features :


Endurance | Standard 1000g Lighter 900 g

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost / seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	A Frame 53cm: 900±30g, Fork: 385±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm) B Frame 53cm: 1000±30g, Fork: 425±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Round Φ27.2mm, 350mm length, 25mm offset
Bottom Bracket	Pressfit BB86.5
Max Chaining	53-39T
Tire Max	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

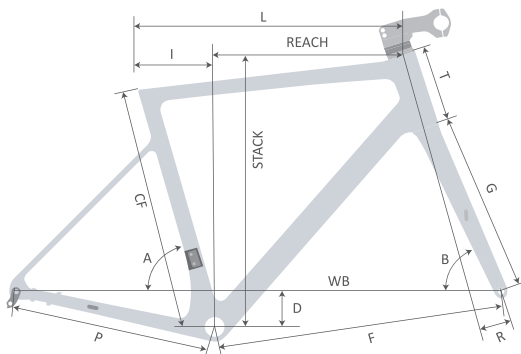

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	450	515	141.5	74.8°	71.5°	579.9	415	120	73	45	368	520.7	373.5	983.3
500	480	533	152.1	74.3°	72°	584.9	415	138	73	45	368	541.2	380.9	988.8
530	510	546	161.3	73.9°	72.5°	594.6	415	157	73	45	368	559.3	384.7	998.6
560	540	567	170.6	73.5°	72.5°	601.6	415	172.6	73	45	368	576	396.4	1005.7
590	570	582	183.7	73°	73.5°	606	415	195	73	45	368	601	398.3	1010.1



R1058-D

Features :

Performance | Frame 54cm(B): 1050±30g


Performance | Frame 54cm(A): 950±30g

Size: 490/520/540/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	A Frame 54cm: 950±30g, Fork: 380±10g, SP: 170±10g, Handlebar: 400±10g (420*90mm) B Frame 54cm: 1050±30g, Fork: 425±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

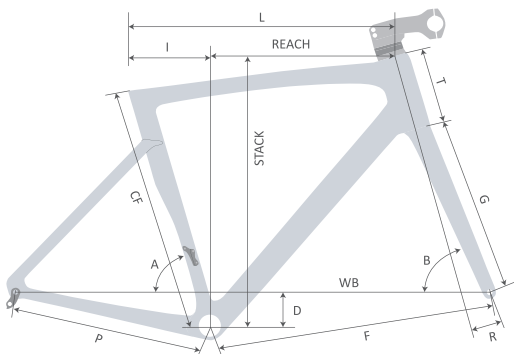

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	460	515	136.5	75°	71.5°	576.5	408	110	69	45	368	508	378.5	975.1
520	490	536	149.8	74°	72.5°	579.5	408	120	69	45	368	520.9	386.2	977.5
540	510	548	160.3	73.5°	73°	582.8	408	140	69	45	368	541.7	387.7	980.9
560	530	565	170.3	73.2°	73.5°	591.4	408	160	69	45	368	562.5	394.7	989.4
590	560	585	178.3	73°	73.5°	608.9	408	180	69	45	368	581.7	406.7	1007.1



R1088-D

Features :

Aero | Frame 53cm: 1050±30g


Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	Frame 53cm: 1050±30g, Fork: 435±10g, SP: 180±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 43mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

03

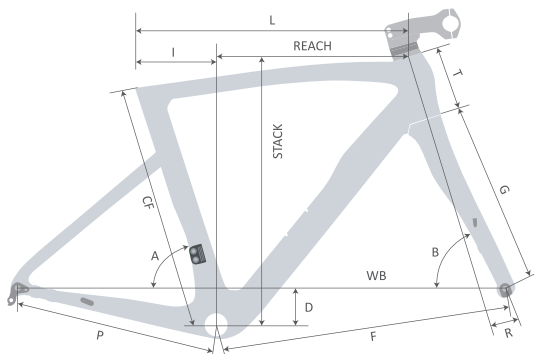

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	440	515	143.4	74.5°	71.5°	570.5	406	110	72	43	373	517.2	371.6	965.4
500	470	530	151.5	74°	72°	576.5	406	120	72	43	373	528.4	378.5	971.6
530	500	545	159	73.7°	72.5°	583	406	130	72	43	373	539.6	386	978.1
560	530	565	163.2	73.5°	73°	597.6	406	140	72	43	373	550.9	401.8	992.8
590	560	585	171.8	73°	73.5°	607.5	406	150	72	43	373	562.1	413.2	1002.8



R068D

Features :


Performance | Frame 53cm: 1140±30g

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/590mm
Weight	Frame 53cm: 1140±30g, Fork: 475±10g, SP: 190±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 45mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 15mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

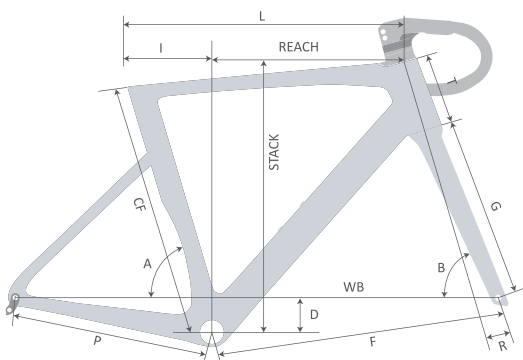

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	460	514.1	138.9	75°	71.5°	577.2	405	120	69	45	368	518.5	375.2	972.1
500	490	535.6	155.1	74°	72.5°	580.6	405	140	69	45	368	540.9	380.5	975.5
530	520	548	166.2	73.5°	73°	583.4	405	160	69	45	368	561.8	381.8	978.4
560	550	565.1	175.3	73.25°	73.5°	592.9	405	180	69	45	368	582.6	389.8	987.8
590	580	587.1	186.9	73°	73.5°	611.7	405	210	69	45	368	611.3	400.2	1007.4



R086D

Features :


Aero | Frame 52cm: 1120±30g

Size: 480/500/520/540/560/580mm



Components	Frame / fork / integrated handlebar/ seatpost/seatclamp / headset / spacers / skewers
Frame Size	480/500/520/540/560/580mm
Weight	Frame 52cm: 1120±30g, Fork: 485±10g, SP: 235±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 43mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific 350mm length, 16.5mm offset
Bottom Bracket	Pressfit BB86.5
Max Chaining	53-39T / 50-34T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

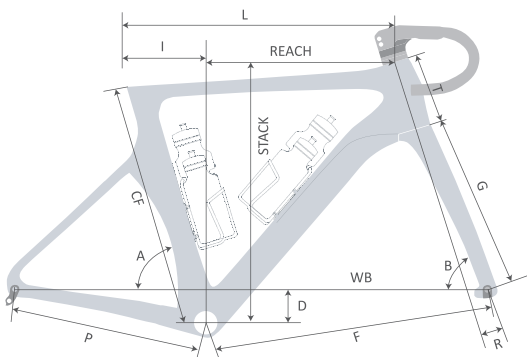

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
480	460	515	134.7	75°	72°	570.9	408	100	70	43	368	502.8	380.8	968.3
500	480	535	143	74.5°	73°	577.6	408	110	70	43	368	515.5	392.3	975.1
520	500	550	150.3	74°	73°	588	408	120	70	43	368	528	399.7	985.6
540	520	565	158.2	73.5°	73°	597.9	408	130	70	43	368	534.6	406.8	995.6
560	540	580	166.9	73°	73.5°	603	408	140	70	43	368	545.8	413.1	1000.8
580	560	595	175.6	72.5°	74°	607.9	408	150	70	43	368	557	419.4	1005.7



R096D

Features :


Endurance | Frame 53cm: 1020±30g

Size: 470/500/530/550/580mm



Components	Frame / fork / integrated handlebar/ seatpost/seatclamp / headset / spacers / skewers
Frame Size	470/500/530/560/580mm
Weight	Frame 53cm: 1020±30g, Fork: 440±10g, SP: 230±10g, Handlebar: 400±10g (420*90mm)
Head Tube	Version 1: 1 1/2" - 1 1/2" (upper 52mm Down 52mm, FSA standard) Version 2: 1 1/8" - 1 1/2" (Upper 42mm, Down 52mm)
Fork	Version 1: Full-internal cable routing, 50mm offset Version 2: Semi-internal cable routing, 50mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with DI2 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Round Φ27.2mm, 350mm length, 25mm offset
Bottom Bracket	Pressfit BB86.5
Max Chainring	55-42T
Tire Max	700*30C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

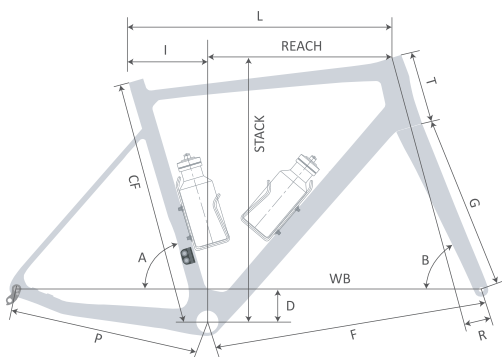

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	430	495	134.9	75°	71°	561.5	408	105	69	45	369	503.5	360.1	959.4
500	475	515	144.5	74.5°	72°	568.9	408	120	69	45	369	521.1	370.5	966.9
530	530	545	164.1	73.5°	73°	580.2	408	151	69	45	369	554.1	380.7	978.5
550	550	565	170.9	73.5°	73°	600.5	408	175	69	45	369	576.9	394.1	998.6
580	580	585	178	73.5°	73°	620.5	408	200	69	45	369	600.9	407	1018.8



G085-D

Features :


Adventure | Frame 54cm: 1140±30g

Size: 490/520/540/560/590mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	Frame 54cm: 1140±30g, Fork: 500±10g, SP: 235±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 31.6mm, 25mm offset, 350mm length
Bottom Bracket	Pressfit BB86.5
Max Chaining	50-34T
Tire Max	700C*50C & 650B*2.25"
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

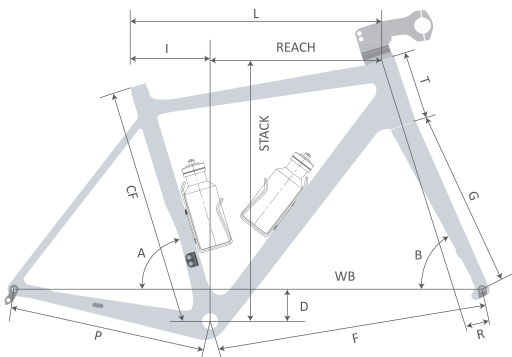

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	520	149.7	74.5°	70.5°	593.8	435	120	67	50	395	539.7	370.3	1019
520	520	535	160.7	74°	71°	600	435	140	67	50	395	560.5	374.3	1025
540	540	550	175	73°	71.5°	600	435	150	67	50	395	571.8	375	1025
560	560	565	181.3	73°	72°	610.2	435	170	67	50	395	592.8	383.7	1035.5
590	590	590	187.1	73°	72°	635.4	435	190	67	50	395	611.9	402.9	1060.9


G1055-D (2024 NEW)

- Features :
- Adventure | Micro-suspension
 - UDH hanger | Storage Room
 - Frame 54cm: 1100±30g
 - Size: 490/520/540/560/580mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/580mm
Weight	Frame 54cm: 1100±30g, Fork: 460±10g, SP:235±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 27.2mm, 25mm offset, 350mm length
Bottom Bracket	BB86
Max Chainring	53-39T
Tire Max	700C*50C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

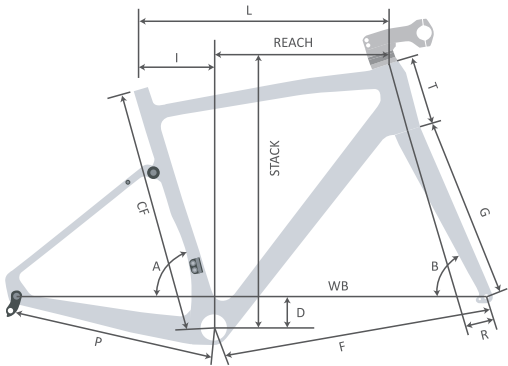

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	525	150	74.5°	70.5°	595.4	435	120	67	50	395	537.7	375	1025.5
520	520	535	160	74°	71°	599.9	435	140	67	50	395	556.6	375	1026.7
540	540	545	168.8	73°	71.5°	601.6	435	150	67	50	395	568	376.2	1028.3
560	560	560	180	73°	72°	605.8	435	170	67	50	395	588.9	380	1031.8
580	580	575	191	72.5°	72°	615.3	435	190	67	50	395	605.9	384	1041.1

G075D

Features :

Adventure | Frame 54cm: 1200±30g


Max Tire 700*50C&650B*2.25"

Size: 490/520/540/560/590mm



Components	Frame / fork / seatpost / stem / seatclamp / headset / spacers / skewers
Frame Size	490/520/540/560/590mm
Weight	Frame 54cm: 1200±30g, Fork: 525±10g, SP: 230±10g, Stem: 170±5g
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Stem	10- degree, internal cable routing design with cable cover Size: 75/90/100/110/120/130mm
Seat Post	Full carbon seat post, OD 27.2mm, 25mm offset, 350mm length
Bottom Bracket	Pressfit BB86.5
Max Chainring	50-34T
Tire Max	700C*50C & 650B*2.25"
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

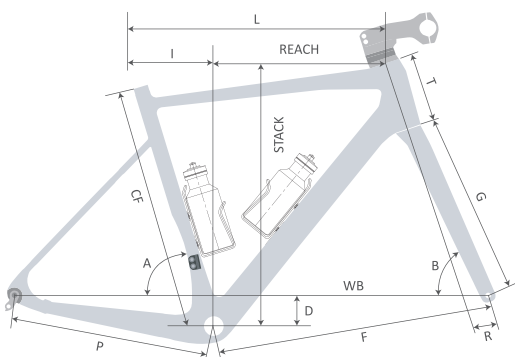

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
490	490	525	155.2	74°	70.5°	594.5	435	125	67	50	395	541.3	369.8	1020.6
520	520	535	165.1	73.5°	71°	595.4	435	140	67	50	395	557.5	369.8	1021.4
540	540	545	173.6	73°	71.5°	595.5	435	150	67	50	395	568	371.4	1021.7
560	560	560	186	72.5°	72°	600.2	435	170	67	50	395	589.8	374	1026.3
590	590	585	192.6	72.5°	72.5°	619.9	435	190	67	50	395	610.8	392.4	1046.1

FS828 (2024 NEW)

Features :

Cross Country | UDH hanger


2000±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	A: 1850±40g / M / BB92 B: 2000±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Dropper seat post compatible
Rear Shock Size	Ø10*30L/190*40mm/Ø8*30L
Travel	Front 120mm, Rear 100mm
Bottom Bracket	BB92/BSA
Max Tire	29er *2.6"
Rotor	Post Mount 160mm
Max Chaining	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, UDH hanger

Geometry

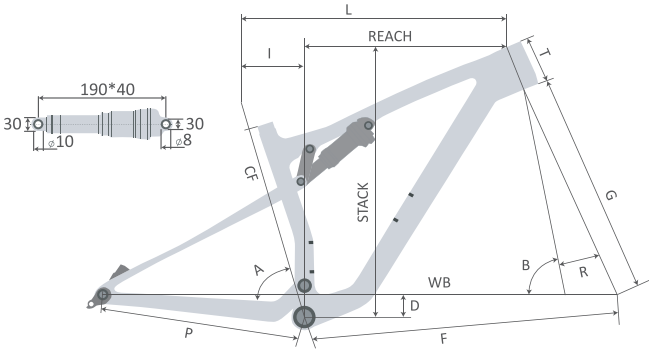

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S"	395	563	151.6	75.5°	67.5°	684	445	95	48	44	505	586	411.4	1124.7
M"	430	598	153.1	75.5°	67.5°	719	445	100	48	44	505	591	445	1160.3
L"	470	626	156.4	75.5°	67.5°	749	445	115	48	44	505	605	469.6	1190.6
XL"	520	656	161.1	75.5°	67.5°	782	445	135	48	44	505	623	494.9	1223.6



FS848(Promotion NOW)

Features :


Trail | 2380±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	2380±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm,FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Dropper seat post compatible
Seatpost Insert Length	S 190mm , M / L / XL 220mm
Rear Shock Size	Ø12.7*12.7L/190*45mm/Ø8*20L (No bushing kit needed)
Travel	Front 130-150mm, Rear 130mm
Bottom Bracket	Pressfit BB92
Max Tire	29er "2.6"
Rotor	Post Mount 160mm
Max Chainring	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

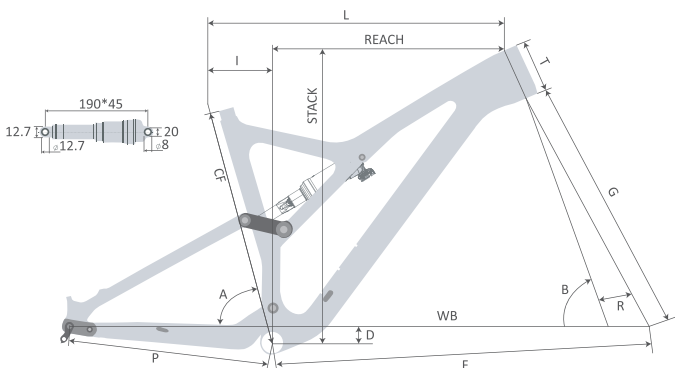

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	410	575	144.3	77°	66.5°	743.8	445	100	34.8	51	565	625.2	430.7	1186.6
M	440	605	145.4	77°	66.5°	774.7	445	105	34.8	51	565	629.8	459.6	1217.6
L	490	635	146.5	77°	66.5°	805.5	445	110	34.8	51	565	634.4	488.5	1248.5
XL	520	655	147.5	77°	66.5°	826.5	445	115	34.8	51	565	639	507.5	1269.4

FS896

Features :

Mountain/Enduro | UDH hanger


2620±40g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Frame Size	S/M/L/XL
Frame Weight	2620±40g / M / BB92
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Dropper seat post compatible
Seatpost Insert Length	S 170mm , M 200mm , X / XL 220mm
Rear Shock Size	Ø8*25L/230*60mm/Ø10*54(trunion mount)
Travel	Front 160mm, Rear 160mm
Bottom Bracket	Pressfit BB92
Max Tire	29er "2.6"
Rotor	Post Mount 180mm
Max Chainring	36T
Brake Type	Disc Brake
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

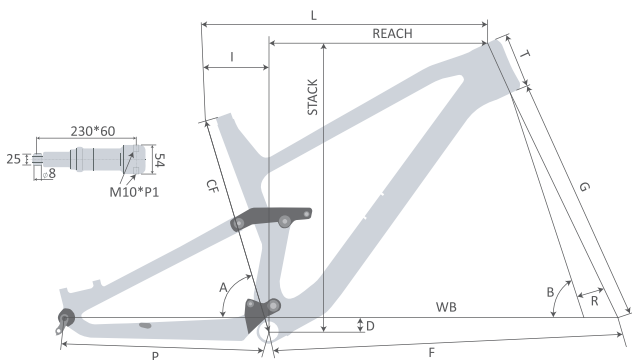

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	585	162.2	75°	65°	748.8	445	100	28	51	561	605.5	422.8	1192.4
M	430	605	164.7	75°	65°	770.6	445	110	28	51	561	614.6	440.3	1214.3
L	480	635	167.1	75°	65°	802.4	445	120	28	51	561	623.6	467.9	1246
XL	520	657	169.5	75°	65°	826.2	445	130	28	51	561	632.7	487.5	1269.8



M536

Features :

Cross Country | UDH hanger


1150±30g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal (cables run through headtube)
Frame Size	S/M/L/XL (15"/17"/19"/20.5")
Frame Weight	1150±30g / M / BB92
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Seat Tube	Φ31.6mm (clamp 34.9) Dropper seat post compatible
Front Travel	100mm
Bottom Bracket	Pressfit BB92
Max Chainring	36T
Tire Max	29er "2.3"
Brake Type	Disc Brake
Rotor	Post Mount 160mm
Dropout O.L.D	TA Φ12*148mm, UDH hanger

Geometry

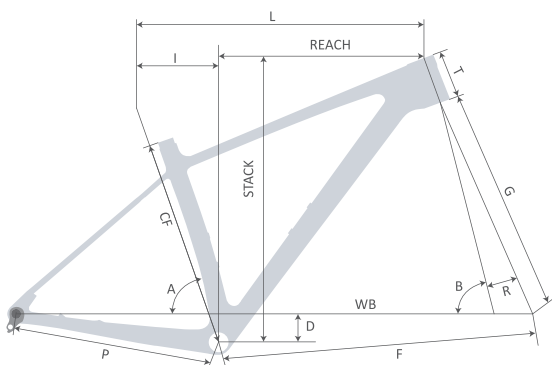

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	390	575	173.9	73.6°	69.5°	656.8	430	95	60	51	490	591	401.1	1079.9
M	440	600	175.3	73.6°	69.5°	681.8	430	100	60	51	490	595.7	424.7	1104.9
L	480	620	179.5	73.6°	69.5°	703.1	430	115	60	51	490	609.8	440.5	1126.3
XL	530	640	182.2	73.6°	69.5°	723.8	430	125	60	51	490	619.1	457.8	1147.1

M596

Features :

Cross Country | UDH hanger


1190±30g / M / BB92

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal (cables run through headtube)
Frame Size	S/M/L/XL
Frame Weight	1190±30g / M / BB92
Head Tube	1 1/2" - 1 1/2" (upper 52mm down 52mm, FSA standard)
Seat Tube	Φ27.2mm (Φ31.6mm clamp)
Front Travel	100mm
Bottom Bracket	Pressfit BB92
Max Chainring	36T
Tire Max	29er "2.3"
Brake Type	Disc Brake
Rotor	Post Mount 160mm
Dropout O.L.D	TA Φ12*148mm, Standard & UDH hanger

Geometry

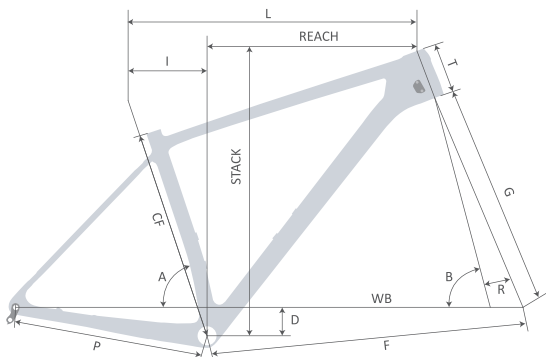


SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	385	579	174.9	74°	68.5°	667.5	425	95	63	42	506	609.5	404.1	1084.8
M	430	604	176.5	74°	68.5°	692.4	425	100	63	42	506	614.2	427.5	1109.8
L	480	633	179	74°	68.5°	722.7	425	110	63	42	506	623.5	454	1140.3
XL	530	662	183	74°	68.5°	753.1	425	125	63	42	506	637.5	479	1170.8

E801 (NEW)

Features:


SHIMANO EP8 | Frame: 3800±40g / M

Size: S/M/L

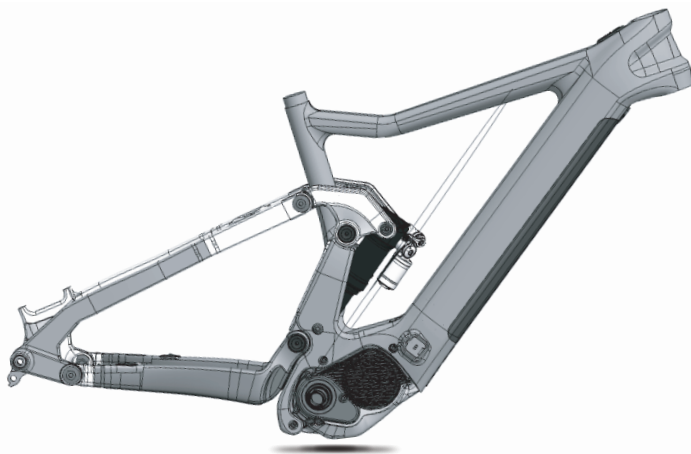

Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	3800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/185*55mm/Ø10*54L (trunion mount) bushing kit: 10*20mm
Recommended Shock	SRAM Delux-rt-185x55mm
Travel	Front: 160mm, Rear: 160mm
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Darfon E4COM (720Wh) / E4COL (835Wh)
Max Chaining	34T (SM-CRE80)
Max Tire	29*2.6" or 27.5*3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm, Standard & UDH

Geometry

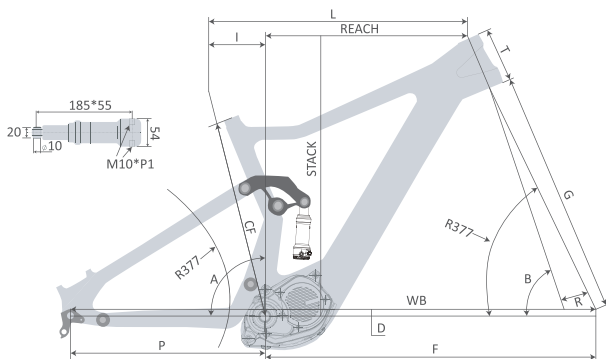

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	590	161.5	75°	66°	748	450	110	15	51	571	614.5	433.2	1198.7
M	457	601	167.1	75°	66°	770.7	450	120	15	51	571	625.5	442.9	1220.3
L	508	630	170.6	75°	66°	790.4	450	130	15	51	571	632.7	462.5	1242

E879

Features:


SHIMANO EP8 | Frame: 3700±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Semi-internal (cables run through side of headtube)
Frame Size	S/M/L/XL
Frame Weight	3700±40g / M
Head Tube	Tapered 1 1/8" - 1 1/2" (upper 44mm down 56mm, FSA No.57ACB)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/185*55mm/Ø10*54L (trunion mount) bushing kit: 10*20mm
Recommended Shock	SRAM Delux-rt-185x55mm
Travel	Front: 150mm, Rear: 150mm
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Shimano BT-E8036 630wh
Max Chainring	34T (SM-CRE80)
Max Tire	29"2.35" or 27.5"3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

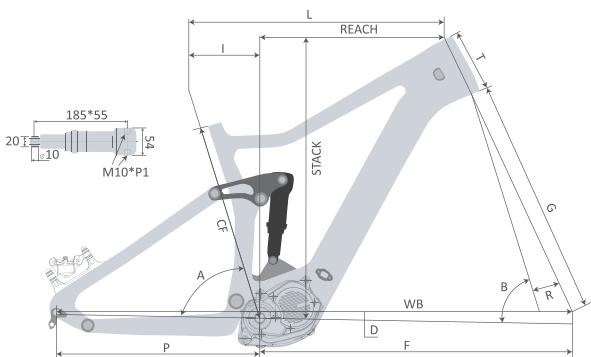

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	585	177.8	74°	66°	737.4	460	120	15	51	563	621	411.2	1197
M	440	601	179.5	74°	66°	749.3	460	130	15	51	563	625.5	421.5	1209
L	483	620.1	182.6	74°	66°	769.4	460	140	15	51	563	634.7	437.5	1229
XL	520	640	184.2	74°	66°	791.8	460	150	15	51	563	643.8	455.8	1251.4

E561

Features:


SHIMANO EP8 | Frame: 2200±40g / M

Size: S/M/L



Components	Frame / seatclamp / headset / rear skewer
Routing System	Semi-internal (Cables run through side of headtube)
Frame Size	S/M/L
Frame Weight	2200±40g / M
Head Tube	Tapered 1 1/8" - 1 1/2" (upper 44mm down 56mm, FSA No.57ACB)
Seat Post	31.6mm(34.9mm clamp)
Motor	Shimano DU-E8000 or EP800 or EP801
Battery	Shimano BT_E8036(630wh)
Travel	Front Travel 100mm
Max Chainring	34T
Max Tire	29"2.35" or 27.5"3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 160mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

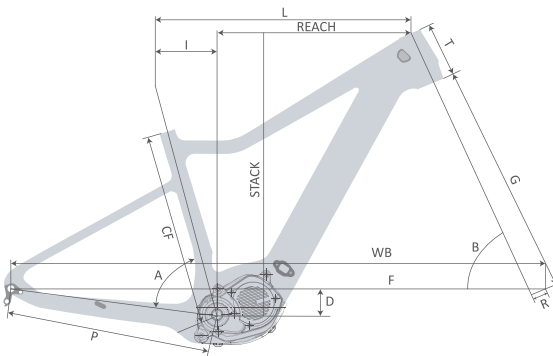

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	400	580	170.2	74.5°	67.5°	697.2	450	110	60	51	511	614.2	409.8	1140.6
M	435	605	172.9	74.5°	67.5°	723.2	450	120	60	51	511	623.4	432.1	1166.7
L	485	625	175.5	74.5°	67.5°	744.3	450	130	60	51	511	632.7	449.5	1187.9

E1029-gravel (NEW)

Features :


Bafang M820 | Frame: 1450g/L

Size: XS/XS/M/L/XL


BAFANG


Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	XS/S/M/L/XL
Weight	Frame L: 1450±30g, Fork: 450±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Ø 27.2mm offset, 350mm length
Motor	Bafang M820
Battery	BT F044 374WH + Extender battery BTF 420 252WH
Max Chainring	53-39T
Max Tire	700*50C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

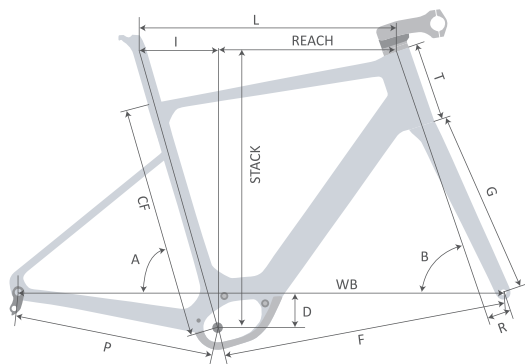

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
XS	440	515	158	74°	70.5°	588	435	143	75	50	395	565	357	1011
S	470	530	160	74°	70.5°	603	435	148	75	50	395	570	370	1026
M	500	548	168	73.5°	71°	615	435	167	75	50	395	590	380	1039
L	530	565	177	73°	71.5°	624	435	186	75	50	395	610	388	1048
XL	560	580	190	72.5°	72°	625	435	195	75	50	395	620	390	1049

BAFANG
E021

Features :


Bafang M800 | Frame: 1750g/530mm

Size: 470/500/530/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/550/580mm
Weight	Frame 53cm: 1750±30g, Fork: 460±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific seatpost 18mm offset, 350mm length
Motor	Bafang M800
Battery	BAFANG BTF05 200wh
Max Chainring	53-39T
Max Tire	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12*142mm, Fork TA Φ12*100mm

Geometry

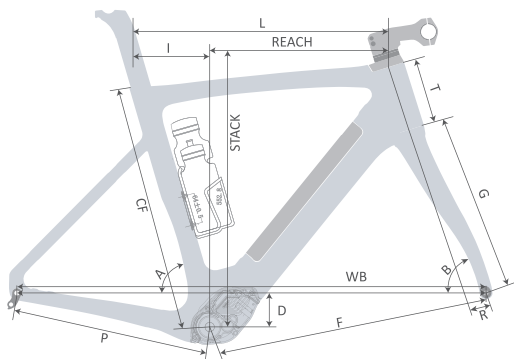

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	515	149.7	74.5°	71.5°	579	415	130	72	50	380	539.8	365.3	983.3
500	500	525	155.3	74°	72°	579.3	415	130	72	50	380	541.6	369.7	983.5
530	530	545	161.7	73.7°	72.5°	591.8	415	140	72	50	380	552.9	383.3	996.1
550	550	560	175.4	73°	73°	594.6	415	160	72	50	380	573.8	384.6	999
580	580	590	187.5	72.5°	73.5°	613.7	415	180	72	50	380	594.7	402.5	1018.2

E868 (NEW)

Features :


Bafang M820 | Frame: 2800g / M

Size: S/M/L


BAFANG


Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L
Frame Weight	2800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10*20L/210*50mm / Ø10*54L
Recommended Shock	SRAM Delux-rt- 210 x 50mm
Seat Post	Front: 130mm, Rear: 130mm
Motor	BAFANG M820
Battery	BT F044 374WH + Extender battery BTF 420 252WH
Max Chainring	36T
Max Tire	29"2.6"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

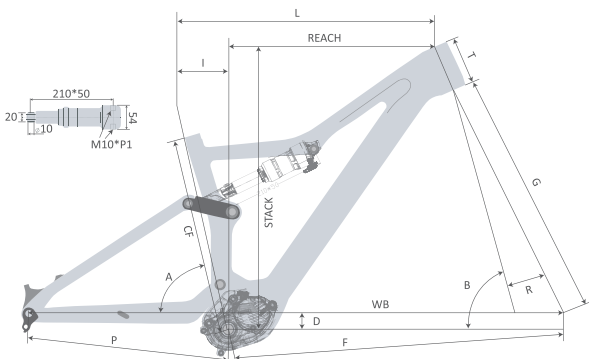

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	580	140.1	77°	66.5°	744.9	445	100	34.8	51	545	606.9	439.9	1187.7
M	457	605	141.2	77°	66.5°	770.75	445	105	34.8	51	545	611.48	463.8	1213.6
L	508	630	142.2	77°	66.5°	796.7	445	110	34.8	51	545	616.1	487.8	1239.6

E898 (NEW)

Features :


Bafang M510 | Frame: 3000g / M

Size: S/M/L


BAFANG


Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L/XL
Frame Weight	3000±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	230*65=156.7 / 230*62.5=150.7 / 230*60=144.5
Recommended Shock	SRAM Delux-rt- 230 x 62.5mm
Travel	Front: 150mm, Rear: 160mm
Motor	BAFANG M510
Battery	BAFANG SYR014 (720wh)
Max Chainring	36T
Max Tire	29"2.6"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12*148mm

Geometry

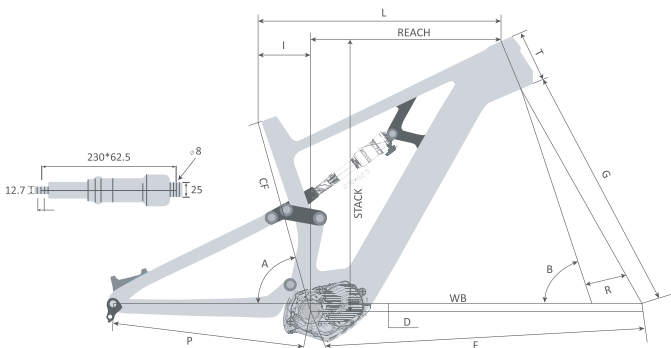

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	406	590	161.5	75°	66°	748	455	110	15	51	571	614.4	433.2	1107
M	457	610	167.1	75°	66°	770.7	455	120	15	51	571	625.5	442.9	1225.4
L	508	630	170.6	75°	66°	790.4	455	130	15	51	571	632.7	462.5	1245

E808

Features:


Bosch GEN4 BES3 | Frame: 3800±40g / M

Size: S/M/L/XL



Components	Frame / seatclamp / headset / rear skewer
Routing System	Full-internal
Frame Size	S/M/L/XL
Frame Weight	3800±40g / M
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Seat Post	31.6mm(34.9mm clamp)
Rear Shock Size	Ø10°30L/185*55mm/Ø10°54L (trunion mount) bushing kit: 10°30mm
Recommended Shock	SRAM Delux-rlr- 185 x 55mm / sdx-rc3 - 185 x 55mm / sdx-rrr - 185 x 55mm
Travel	Front: 160mm, Rear: 160mm
Motor	Bosch GEN4 BES3
Battery	Bosch bes3_pt750_pivot rail horizontal
Max Chainring	34T (SM-CRE80)
Max Tire	29"2.6" or 27.5"3.0"
Brake Type	Disc Brake
Rotor	Shimano Post Mount 180mm
Dropout O.L.D	Rear TA Φ12°148mm

Geometry

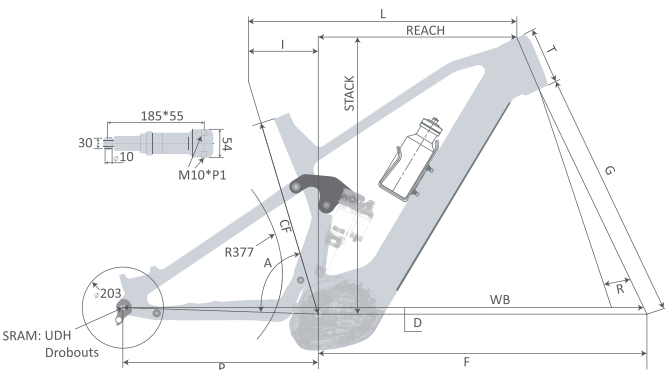

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
S	405	591.4	173.4	74.5°	64.5°	767.1	450	120	11.1	51	578	620	418	1216.8
M	440	602.4	173.9	74.5°	64.5°	779.9	450	130	11.1	51	578	629.1	428.5	1229.7
L	480	621.5	176.5	74.5°	64.5°	800.8	450	140	11.1	51	578	638.3	445	1250.6
XL	520	641.5	178.9	74.5°	64.5°	822.7	450	150	11.1	51	578	647.5	462.6	1272.5



E051

Features:


Fazua Evation | Frame: 1750g/530mm

Size: 490/520/540/560/590mm



Components	Frame / fork / integrated handlebar/ seatpost /seatclamp / headset / spacers / skewers
Frame Size	470/500/530/550/580mm
Weight	Frame 53cm: 1750±30g, Fork: 450±10g, SP: 200±10g, Handlebar: 400±10g (420*90mm)
Head Tube	1 1/2" - 1 1/2" (Upper 52mm down 52mm, FSA standard)
Fork	Full internal cable routing, 50mm offset
Handlebar	Full internal cable routing, drop 125mm, reach 81mm with D12 hole Width: 380/400/420/440mm (C-C) Stem: 90/100/110/120/130mm
Seat Post	Specific seatpost 18mm offset, 350mm length
Motor	Fazua Evation
Battery	Fazua 250w 25km/h
Max Chainring	53-39T
Max Tire	700*32C
Brake Type	Disc Brake
Rotor	Shimano Flat Mount 140mm or 160mm
Dropout O.L.D	Rear TA Φ12"142mm, Fork TA Φ12"100mm

Geometry

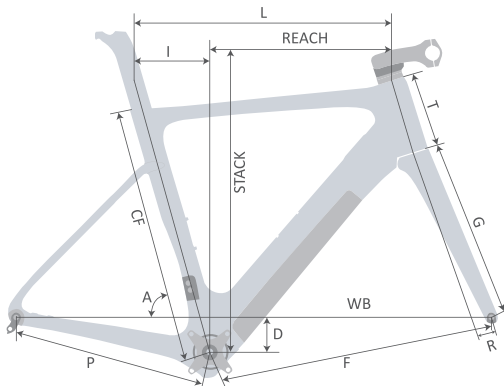

SIZE	CF	L	I	A	B	F	P	T	D	R	G	STACK	REACH	WB
470	470	515	149.7	74.5°	71.5°	579	415	130	72	50	380	539.8	365.3	983.3
500	500	525	155.3	74°	72°	579.3	415	130	72	50	380	541.6	369.7	983.5
530	530	545	161.7	73.7°	72.5°	591.8	415	140	72	50	380	552.9	383.3	996.1
550	550	560	175.4	73°	73°	594.6	415	160	72	50	380	573.8	384.6	999
580	580	590	187.5	72.5°	73.5°	613.7	415	180	72	50	380	594.7	402.5	1018.2

YISHUNBIKE



www.yishunbike.com

YISHUNBIKE GmbH

Linsellesstr. 127 47877 Willich, Germany

DE: Tel +49(0) 2154-9508681

Email : info@yishunbike.com

Yishun Carbon Composite Tech. Co., LTD

3rd Bldg, Lianxing Technology Industrial Park,
32 Xinyuan Road, Xiamen 361022 China.

Tel: +86-592-5620028

Email: info@yishunbike.com